


Lake Havasu City Universal Handicap Space Standards

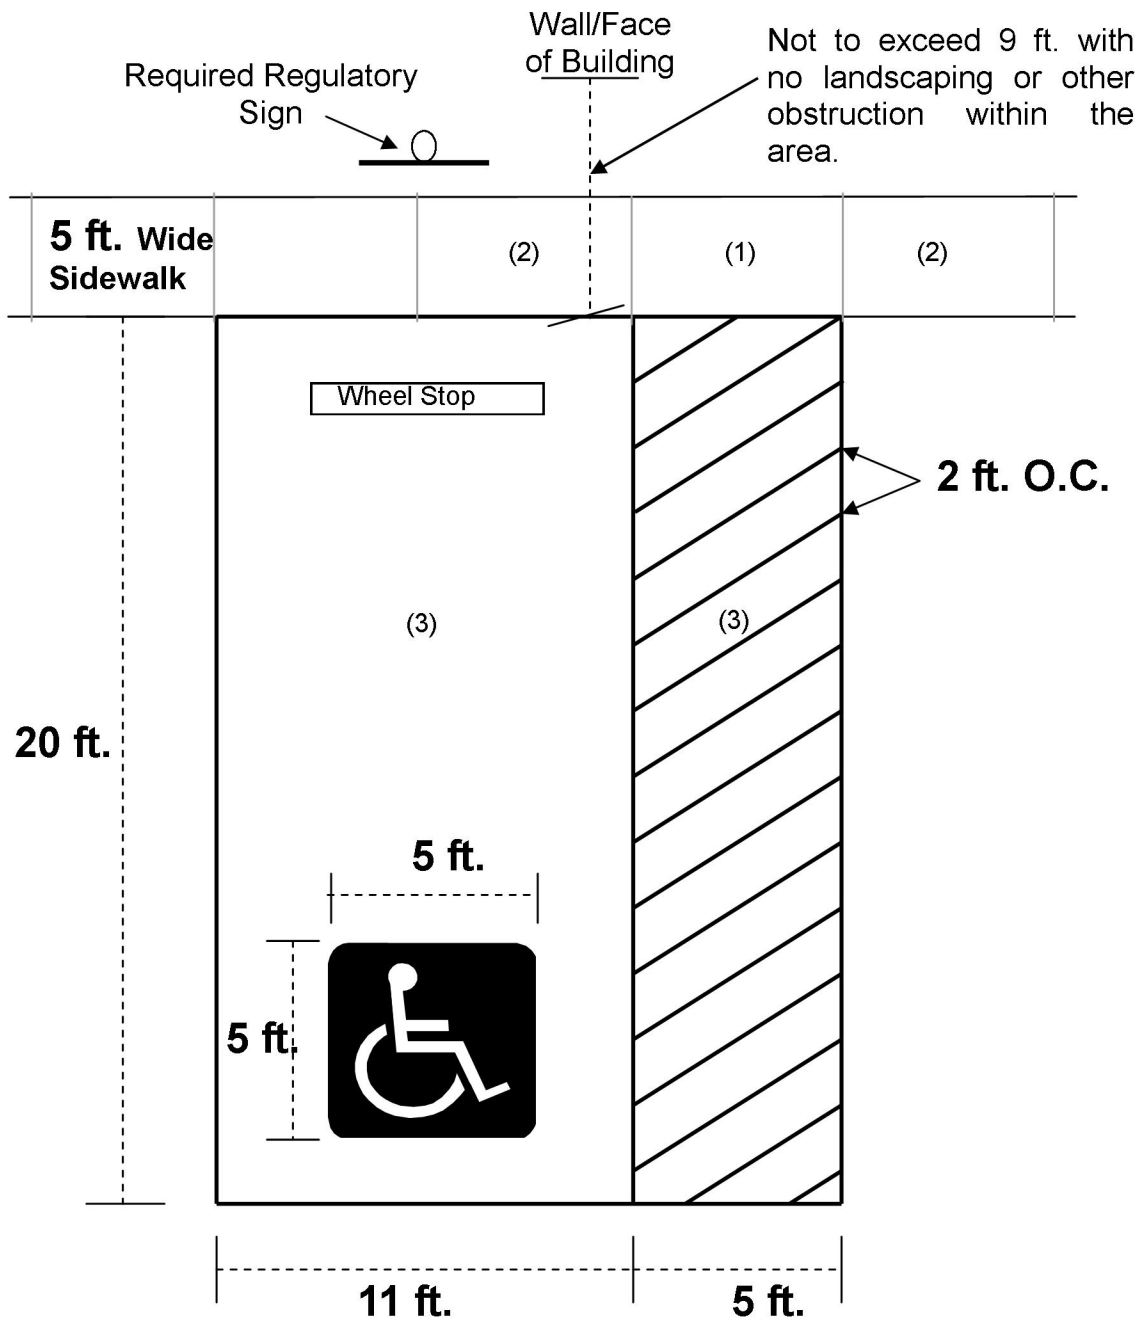

Universal Handicap Space Standards

• Slope Requirements

- (1) 5 ft. square area cannot exceed 1:50 slope ratio in any direction if a raised sidewalk situation exists.
- (2) Curb ramps are required with a raised sidewalk situation. Ramps cannot exceed a 1:12 slope ratio.
- (3) 11 ft. space and 5 ft. access aisle can not exceed 1:50 slope ratio in any direction.

- Wheel stop optional with curbed sidewalk. Wheel stop with no curb must be a minimum of 2 ft. back of edge of sidewalk.
- Accessible spaces must be prominently outlined in colors or physical barriers from regular parking spaces.
- International symbol required with blue background and yellow symbol.
- Minimum 3 in. outline striping required. White on asphalt and traffic yellow on concrete. Measurements are taken from center to center.
- Required standard regulatory sign must be mounted on custom/decorative post. Sign can be mounted on a wall if located within 4 ft. of edge of sidewalk.
- Access aisle must be clearly marked with cross-hatching stripes spaced 2 ft. on center (O.C.).