



POLICE DEPARTMENT  
**LAKE HAVASU CITY**

2360 McCULLOCH BOULEVARD NORTH  
LAKE HAVASU CITY, ARIZONA 86403-5947

To Whom It May Concern:

I hereby attest that Josh Sondrol is a Certified Intoxilyzer Quality Assurance Specialist for the Lake Havasu City Police Department.

I certify that the attached documentation of Standard Quality Assurance Procedures and/or Standard Calibration Check Procedure are full, true and correct copy of the original.

Josh Sondrol  
Signature

STATE OF ARIZONA     )  
  ) ss  
COUNTY OF MOHAVE    )


Subscribed and sworn to before me this 19 day of JUNE.

2012 by CARLA DUARTE

Carla Duarte  
NOTARY PUBLIC

6-19-12  
DATE

Commission expires:

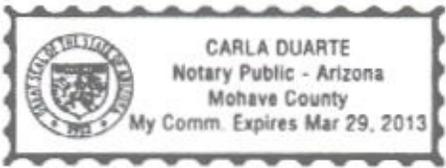

Area Code 928

- |                       |          |                             |          |                               |          |
|-----------------------|----------|-----------------------------|----------|-------------------------------|----------|
| Administration .....  | 855-4884 | Fax #'s                     |          | Emergency .....               | 9-1-1    |
| Business Office ..... | 855-1171 | Administration .....        | 680-5430 | Non-Emergency Dispatch/ ..... | 855-4111 |
| Investigations .....  | 855-5775 | Business Office .....       | 680-5431 | TDD                           | 855-4114 |
| Patrol .....          | 855-0515 | Investigations/Patrol ..... | 680-5432 | Havasu Silent Witness .....   | 854-TIPS |

E-mail: [police@ihcaz.gov](mailto:police@ihcaz.gov)

EXHIBIT G-2  
 THIS REPORT PREPARED PURSUANT TO DUTY IMPOSED BY A.A.C. R13-10-104 (A)  
 ARIZONA DEPARTMENT OF PUBLIC SAFETY  
 STANDARD QUALITY ASSURANCE PROCEDURES  
 INTOXILYZER MODEL 8000  
 STANDARD CALIBRATION CHECK PROCEDURE

QA SPECIALIST J SONDRAL 187 AGENCY LAKE HAVASU CITY PD

DATE 6-18-12 TIME 1959

INTOXILYZER SERIAL # 80-003355 LOCATION L.B. CHANNEL SIGN 8

- 1. Ensure that gas tank is attached to instrument and contains a standard alcohol concentration solution .100 AC.  
 OR  
 Pour a standard alcohol concentration solution \_\_\_\_\_ AC, into a clean dry simulator and assemble the simulator. Ensure that a tight seal has been made. Turn on the simulator and allow temperature to reach 34°C ± 0.2°C
- 2. Intoxilyzer 8000 display reads "PUSH BUTTON TO START"
- 3. Go to the "Control Testing Menu". Select "D" for dry control test or "W" for wet control test. After selection is made press ENTER.
- 4. Air blank completed.
- 5. Calibration check completed. Test results 0. 098 AC.
- 6. Air blank completed.
- 7. Remove printed record. Attach the record to the completed checklist.

SIGNATURE J Sondral 187

9/18/

INTOXILYZER 8000  
Location: LB CHANNEL SIGN 8  
Serial Number: 80-003355  
Core Version: 8105.48  
06/18/2012 19:59:43

-----  
Standard Lot#: 35710100A1  
Last Changed By: E. WILSON #226  
-----

QAS: J. SONDRON #187  
LAKE HAVASU CITY PD  
-----

Operator: J. SONDRON #187  
LAKE HAVASU CITY PD  
-----

Test	g/210L	Time
Air Blank	0.000	20:00:17
0.100 Cal Check	0.098	20:00:38
Air Blank	0.000	20:01:07

Preventative Maintenance  
Performed -- Timer Reset

98187

EXHIBIT G-4  
THIS REPORT PREPARED PURSUANT TO DUTY IMPOSED BY A.A.C. R13-10-104 (A)

ARIZONA DEPARTMENT OF PUBLIC SAFETY

STANDARD QUALITY ASSURANCE PROCEDURES  
INTOXILYZER MODEL 8000

STANDARD QUALITY ASSURANCE PROCEDURE

QA SPECIALIST J SANDRONE 187 AGENCY LAKE HAVASU CITY PD

DATE 6-18-12 TIME 2006

INTOXILYZER SERIAL # 80-003355 LOCATION L.B. CHAVEZ SIGN 8

1. Display Reads "PUSH BUTTON TO START"

DIAGNOSTIC TESTS

1. Clock time check.

2. Date check

OPERATIONAL TESTS

1. Alcohol-free subject test result 0. 000 AC.

2. Error recognition logic system functioning.  
Not a Successfully Completed Test Sequence printed

3. Proper sample recognition system.  
Not a Successfully Completed Test Sequence printed

4. Standard Calibration Check standard 0. 100 AC. Result 0. 097 AC.

Instrument is operating properly and accurately. YES  NO

COMMENTS

SIGNATURE J Sandrone 187

48187

INTOXILYZER 8000  
Location: LB CHANNEL SIGN 8  
Serial Number: 80-003355  
Core Version: 8105.48  
06/18/2012

20:02:21

Standard Lot#: 35710100A1  
Last Changed By: E. WILSON #226

QAS: J. SONDROL #187  
LAKE HAVASU CITY PD

Operator: J. SONDROL #187  
LAKE HAVASU CITY PD

Subject: SQAP,TEST  
DOB: 01/01/1950  
Sex: M Weight: 123

15 Minute Deprivation Period? Yes

Test	g/210L	Time
Air Blank	0.000	20:03:13
Diagnostic Test	Pass	20:03:48
Air Blank	0.000	20:04:15
0.100 Cal Check	0.097	20:04:36
Air Blank	0.000	20:05:06
Subject Test	0.000	20:05:20
Air Blank	ABT*	20:05:27
Air Blank	IPS**	20:05:39

\*Sequence Aborted  
\*\*Improper Sample

Not a Successfully Completed Test Sequence

INTOXILYZER 8000

Location: LB CHANNEL SIGN 8

Serial Number: 80-003355

Core Version: 8105.48

06/18/2012

20:06:18

---

Standard Lot#: 35710100A1

Last Changed By: E. WILSON #226

---

QAS: J. SONDRON #187

LAKE HAVASU CITY PD

---

Operator: J. SONDRON #187

LAKE HAVASU CITY PD

---

Subject: SQAP,TEST

DOB: 01/01/1950

Sex: M Weight: 123

---

15 Minute Deprivation Period? Yes

---

Test	g/210L	Time
Air Blank	0.000	20:07:07
Diagnostic Test	Pass	20:07:42
Air Blank	0.000	20:08:10
0.100 Cal Check	0.098	20:08:31
Air Blank	0.000	20:09:00
Subject Test	0.337*	20:12:08
Air Blank	0.000	20:12:41
Air Blank	0.000	20:13:09
Subject Test	XXX**	20:13:28
Air Blank	RFI***	20:13:37

\*Deficient Sample

\*\*Invalid Sample

Begin new deprivation period

\*\*\*RFI Detect

**Not a Successfully Completed Test Sequence**

4/18/14

EXHIBIT G-2  
THIS REPORT PREPARED PURSUANT TO DUTY IMPOSED BY A.A.C. R13-10-104 (A)

ARIZONA DEPARTMENT OF PUBLIC SAFETY  
STANDARD QUALITY ASSURANCE PROCEDURES  
INTOXILYZER MODEL 8000  
STANDARD CALIBRATION CHECK PROCEDURE

QA SPECIALIST J SANDRAC AGENCY LAKE HAVASU CITY PD  
DATE 6-18-12 TIME 2014  
INTOXILYZER SERIAL # 80-003355 LOCATION L-R CHANNEL SIGN 8

- 1. Ensure that gas tank is attached to instrument and contains a standard alcohol concentration solution .100 AC.  
OR  
Pour a standard alcohol concentration solution \_\_\_\_\_ AC, into a clean dry simulator and assemble the simulator. Ensure that a tight seal has been made. Turn on the simulator and allow temperature to reach  $34^{\circ}\text{C} \pm 0.2^{\circ}\text{C}$
- 2. Intoxilyzer 8000 display reads "PUSH BUTTON TO START"
- 3. Go to the "Control Testing Menu". Select "D" for dry control test or "W" for wet control test. After selection is made press ENTER.
- 4. Air blank completed.
- 5. Calibration check completed. Test results 0. \_\_\_\_\_ AC.
- 6. Air blank completed.
- 7. Remove printed record. Attach the record to the completed checklist.

SIGNATURE J Sandrac 187

DPS Form Exh G-2 (Rev 05-01)

\*TURNED OFF RADIO + RFI DETECT\*  
\*DID ANOTHER G-2\*

4/18/1

INTOXILYZER 8000  
Location: LB CHANNEL SIGN 8  
Serial Number: 80-003355  
Core Version: 8105.48  
06/18/2012 20:14:55

-----  
Standard Lot#: 35710100A1  
Last Changed By: E. WILSON #226  
-----

QAS: J. SONDRON #187  
LAKE HAVASU CITY PD  
-----

Operator: J. SONDRON #187  
LAKE HAVASU CITY PD  
-----

Test	g/210L	Time
Air Blank	0.000	20:15:25
0.100 Cal Check	RFI*	20:15:42
Air Blank	0.000	20:16:13

\*RFI Detect



4187

INTOXILYZER 8000  
Location: LB CHANNEL SIGN 8  
Serial Number: 80-003355  
Core Version: 8105.48  
06/18/2012 20:16:45

-----  
Standard Lot#: 35710100A1  
Last Changed By: E. WILSON #226  
-----

CAS: J. SONDROL #187  
LAKE HAVASU CITY PD  
-----

Operator: J. SONDROL #187  
LAKE HAVASU CITY PD  
-----

Test	g/210L	Time
Air Blank	0.000	20:17:15
0.100 Cal Check	0.097	20:17:36
Air Blank	0.000	20:18:06

Preventative Maintenance  
Performed -- Timer Reset